


Dimension Data

Spring Applied Brakes GP.SAB Series

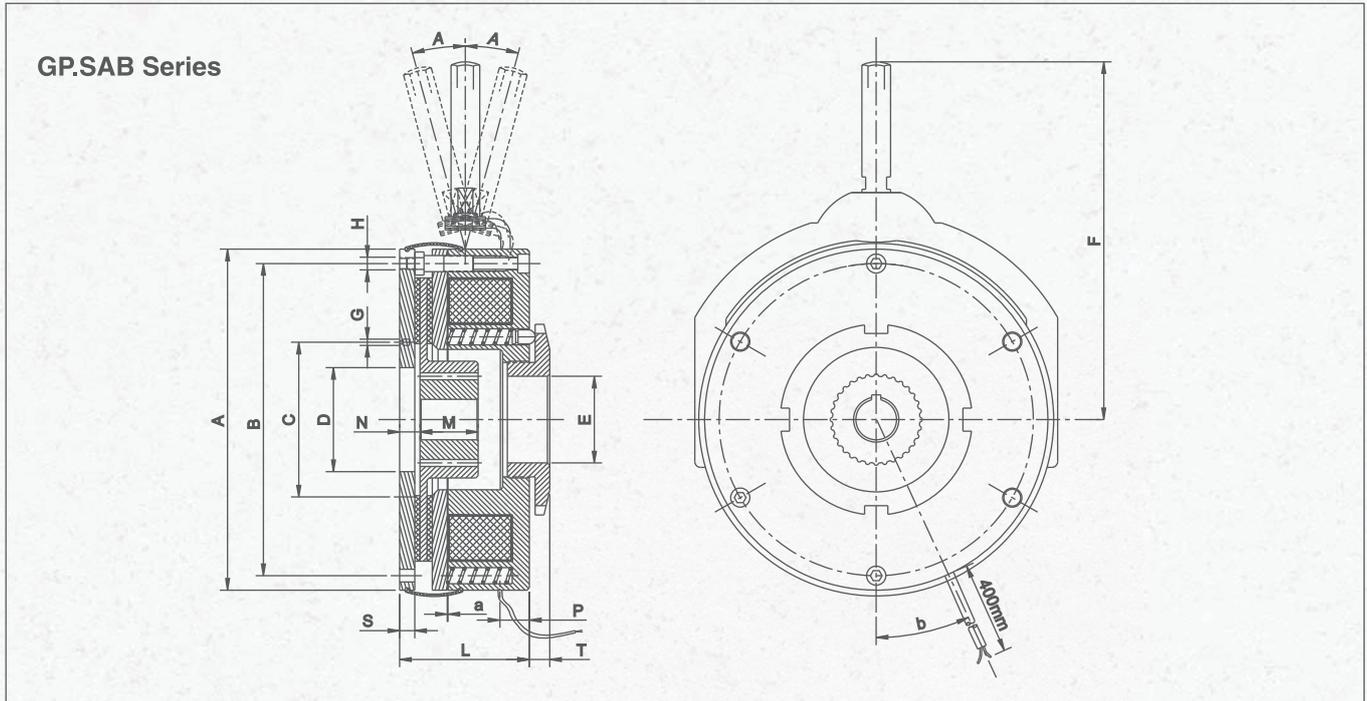

Size	06	08	10	12	14	16	18	20	25	
	5	10	20	35	65	85	155	250	400	
Exciting Voltage	24/90/190	24/90/190	24/90/190	24/90/190	24/90/190	24/90/190	24/90/190	24/90/190	24/90/190	
Power (at 20°C) W	20	25	30	40	50	55	65	75	100	
Max. RPM	3000	3000	3,000	3,000	3,000	3,000	2,000	2,000	2,000	
D I M E N S I O N S	A	84	105	130	147	162	190	215	254	298
	B	72	90	112	132	145	170	196	230	270
	C	30	45	56	62	74	84	100	120	150
	E	18	22	33	40	48	56	64	73	95
	F	95	110	140	165	185	220	260	300	320
	G	3 X 4.5	3 X 5.5	3 X 6.5	3 X 6.5	3 X 9	3 X 9	6 X 9	6 X 9	6 X 11
	H	3 X 4.5	3 X 5.5	3 X 6.5	3 X 6.5	3 X 9	3 X 9	6 X 9	6 X 9	6 X 11
	L	44	48	59	66	76	84	96	108	111.5
	M	18	20	20	25	30	30	35	40	50
	N	7.8	9.5	12.5	12	14	14	15	17.5	17.5
	P	17	18	25	31	36	40	33	47	47
	S	6	7	9	9	11	11	11	11	12.5
	T	3.5	4	4	5	5	6	6	8	17.5
	AIR GAP a	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5
Weight (kg)	1.2	1.8	3.0	4.8	7.3	12	18	27	38	
b	25°	25°	25°	25°	25°	25°	25°	25°	25°	